


Prędkość przepływu powietrza w okrągłych kanałach wentylacyjnych

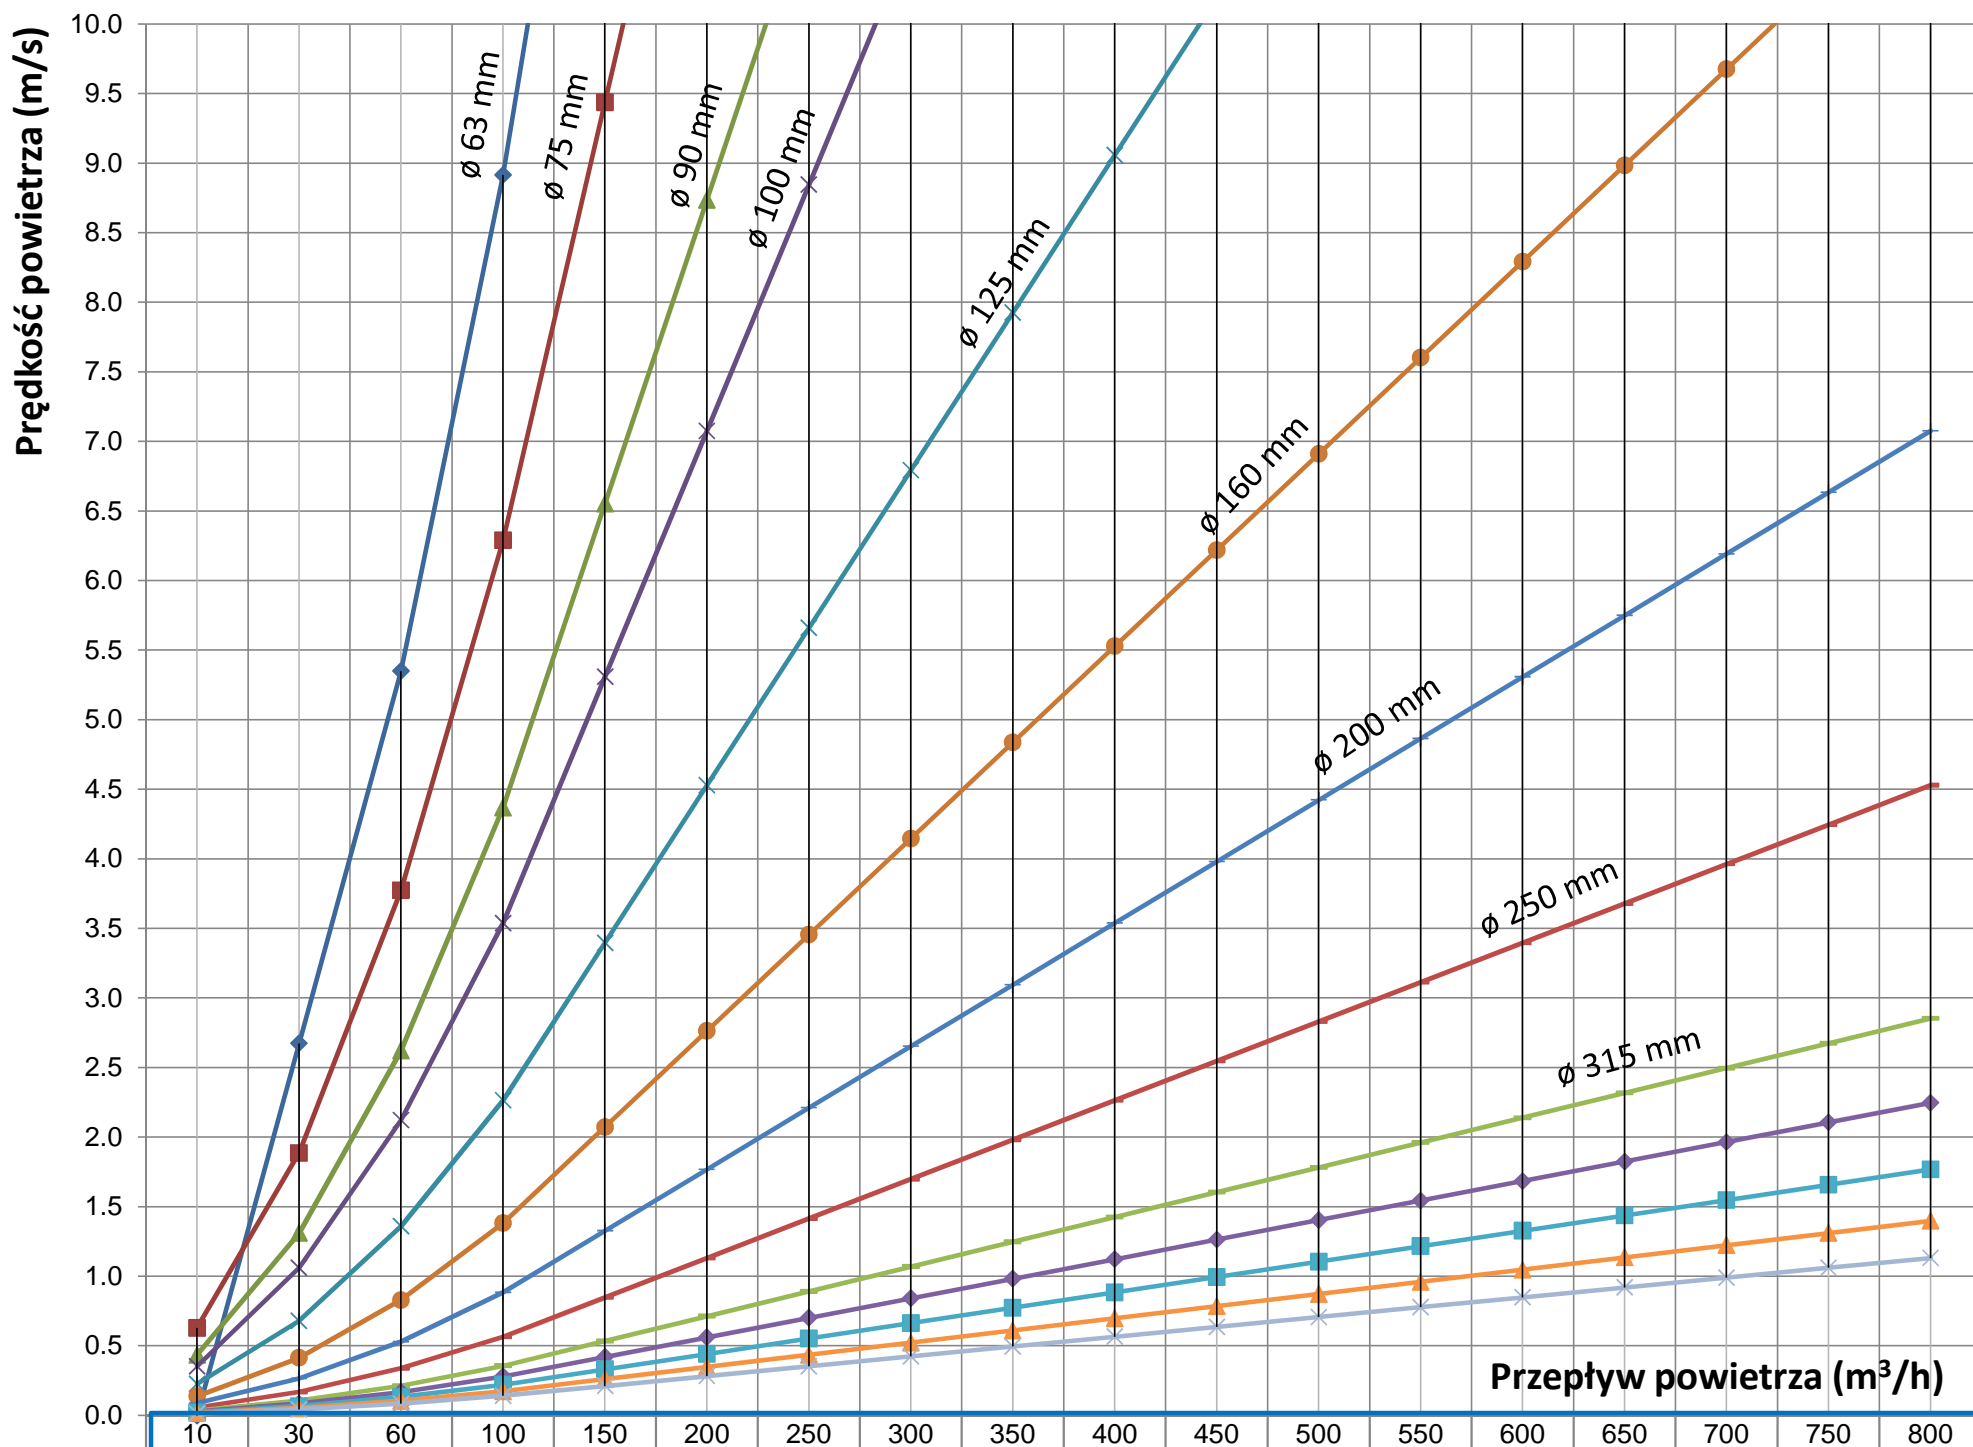

	10	30	60	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
ø 63 mm	0.0	2.7	5.3	8.9	13.4	17.8	22.3	26.7	31.2	35.7	40.1	44.6	49.0	53.5	58.0	62.4	66.9	71.3
ø 75 mm	0.6	1.9	3.8	6.3	9.4	12.6	15.7	18.9	22.0	25.2	28.3	31.5	34.6	37.7	40.9	44.0	47.2	50.3
ø 90 mm	0.4	1.3	2.6	4.4	6.6	8.7	10.9	13.1	15.3	17.5	19.7	21.8	24.0	26.2	28.4	30.6	32.8	34.9
ø 100 mm	0.4	1.1	2.1	3.5	5.3	7.1	8.8	10.6	12.4	14.2	15.9	17.7	19.5	21.2	23.0	24.8	26.5	28.3
ø 125 mm	0.2	0.7	1.4	2.3	3.4	4.5	5.7	6.8	7.9	9.1	10.2	11.3	12.5	13.6	14.7	15.9	17.0	18.1
ø 160 mm	0.1	0.4	0.8	1.4	2.1	2.8	3.5	4.1	4.8	5.5	6.2	6.9	7.6	8.3	9.0	9.7	10.4	11.1
ø 200 mm	0.1	0.3	0.5	0.9	1.3	1.8	2.2	2.7	3.1	3.5	4.0	4.4	4.9	5.3	5.8	6.2	6.6	7.1
ø 250 mm	0.1	0.2	0.3	0.6	0.8	1.1	1.4	1.7	2.0	2.3	2.5	2.8	3.1	3.4	3.7	4.0	4.2	4.5
ø 315 mm	0.0	0.1	0.2	0.4	0.5	0.7	0.9	1.1	1.2	1.4	1.6	1.8	2.0	2.1	2.3	2.5	2.7	2.9
ø 355 mm	0.0	0.1	0.2	0.3	0.4	0.6	0.7	0.8	1.0	1.1	1.3	1.4	1.5	1.7	1.8	2.0	2.1	2.2
ø 400 mm	0.0	0.1	0.1	0.2	0.3	0.4	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.7	1.8
ø 450 mm	0.0	0.1	0.1	0.2	0.3	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.0	1.1	1.2	1.3	1.4
ø 500 mm	0.0	0.0	0.1	0.1	0.2	0.3	0.4	0.4	0.5	0.6	0.6	0.7	0.8	0.8	0.9	1.0	1.1	1.1

- ◆ ø 63 mm
- ø 75 mm
- ▲ ø 90 mm
- × ø 100 mm
- ✱ ø 125 mm
- ø 160 mm
- ø 200 mm
- ø 250 mm
- ▲ ø 315 mm
- ◆ ø 355 mm
- ø 400 mm
- ▲ ø 450 mm
- × ø 500 mm